




CIRALIGHT

SMART SKYLIGHTS

The #1 Active DayLighting System

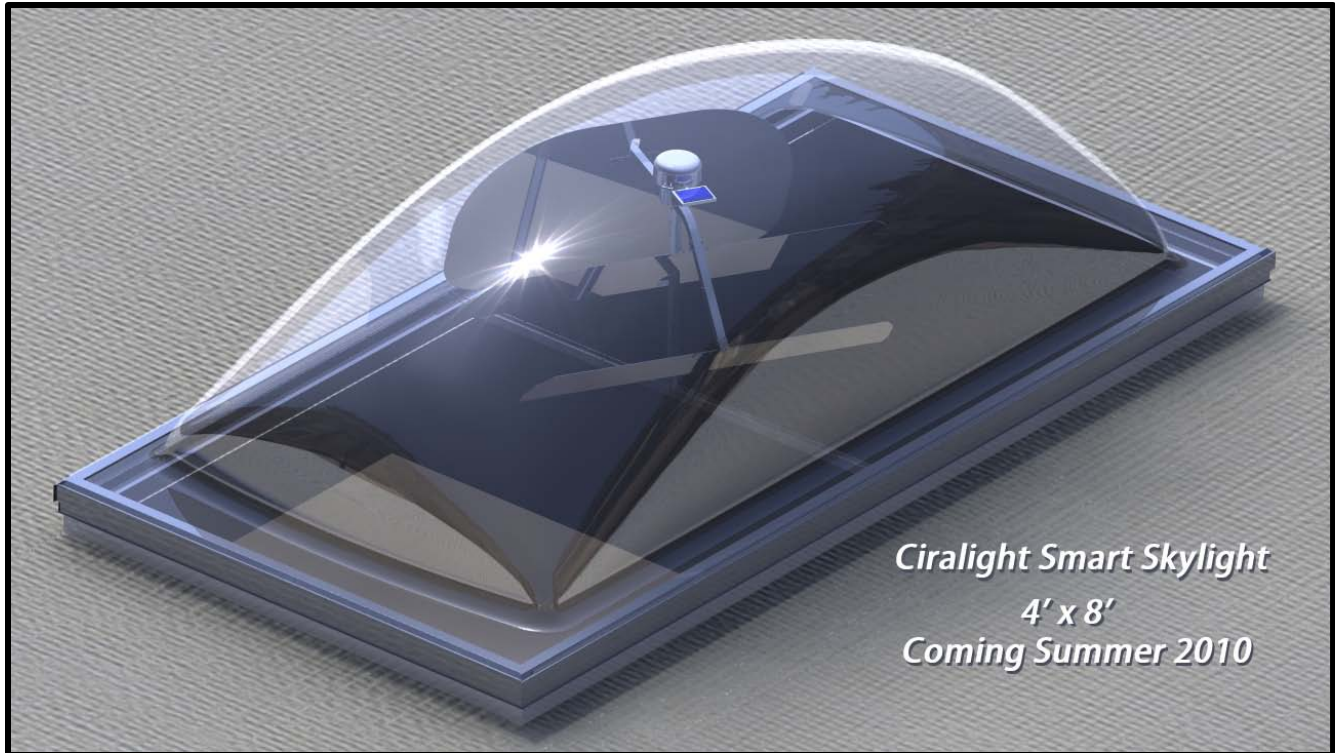

Ciralight Smart Skylight
4' x 8'
Coming Summer 2010

Specifications

Overall Dimensions	48 X 96 X 26 in. (1219.19 X 2438.39 X 660 mm)
Dome	Extruded sheet of high impact, optically clear, acrylic with UV protection. Light Transmissions: ASTM D-1003, 91% at 0.125 thickness. Rockwell hardness: ASTM D-785 (M Scale), 45 Impact Strength: ASTM D-256 (IZOD). 1.2 at 73 degrees F and 0.5 at 0 degrees F.
Frame	Extruded aluminum alloy type 6063 T5 welded, with integral condensation gutters, gaskets and factory mounted airtight lens.
Mirror	A triple mirror system aluminum reflector coated with a super reflective Oxide-layer system on one side to reflect light. Reflection to ASTM: E-1651 (95%).
GPS Controller	Polycarbonate/ABS blend solar powered GPS controller has the ability to accurately calculate and track the sun's position regardless of weather.
Website	www.ciralightglobal.com

Toll Free: 1-877-520-5005

